


	1932R	4045R
Working Height	7,64	13.96 m
A. Platform Height - Elevated	5,64	11.96m
B. Platform Height - Lowered	1,0m	1.4m
C. Platform Railing Height	1.15m	1.13m
D. Stowed Height (Rails Folded)	1.64m	1.9m
E. Platform Size Inside (W x L)	0.65m x 1.59m	1.05m x 2.43m
F. Deck Extension	0.84m	0.91m
G. Overall Width	0.73m	1.14m
H. Overall Length	1.74m	2.71m ³
I. Wheelbase	1.40m	2.32m
J. Ground Clearance (centre of machine)	9,5cm	12,6cm
Platform Capacity ¹	230kg	350kg ⁴
Capacity on Deck Extension	120kg	120kg
Lift/Lower Time	24 / 29 sec.	48/73 sec.
Maximum Drive Height	5.64m	11.88
Machine weight ²	1,565 kg	3,175 kg
Maximum Ground Bearing Pressure	8.40 kg/cm²	9,00 kg/cm²
Drive Speed - Lowered	4.0 km/h	3.2 km/h
Drive Speed - Elevated	0.5 km/h	0.8 km/h
Gradeability	25%	25%
Turning Radius - Inside	0.0m	0.0m
Turning Radius - Outside	1.69m	2.54m
Tyres (Non-Marking Solid)	323 x 100	406 x 127
Brakes	Hydraulic	Hydraulic
Drive (Nominal)	Hydraulic	Hydraulic
Batteries	4x 6V 220A/hr	4x 12V 220A/hr
Charger (120/240V -50/60Hz)	24v @27Amp Automatic	24v @27Amp Automatic
Pump Motor	4.5kW	4.5kW
Hydraulic System	18L	30L

¹ Capacities shown are maximum with 2 persons indoor on both models.
Outdoor ratings are: 6RS - 1 Person/230kg ; 10RS - 1 person/320kg
² Certain options or country standards may increase weight and/or dimensions.
³ includes ladder, excluding ladder 2,56m
⁴ indoor, 250kg outdoor

JLG Model 1932R

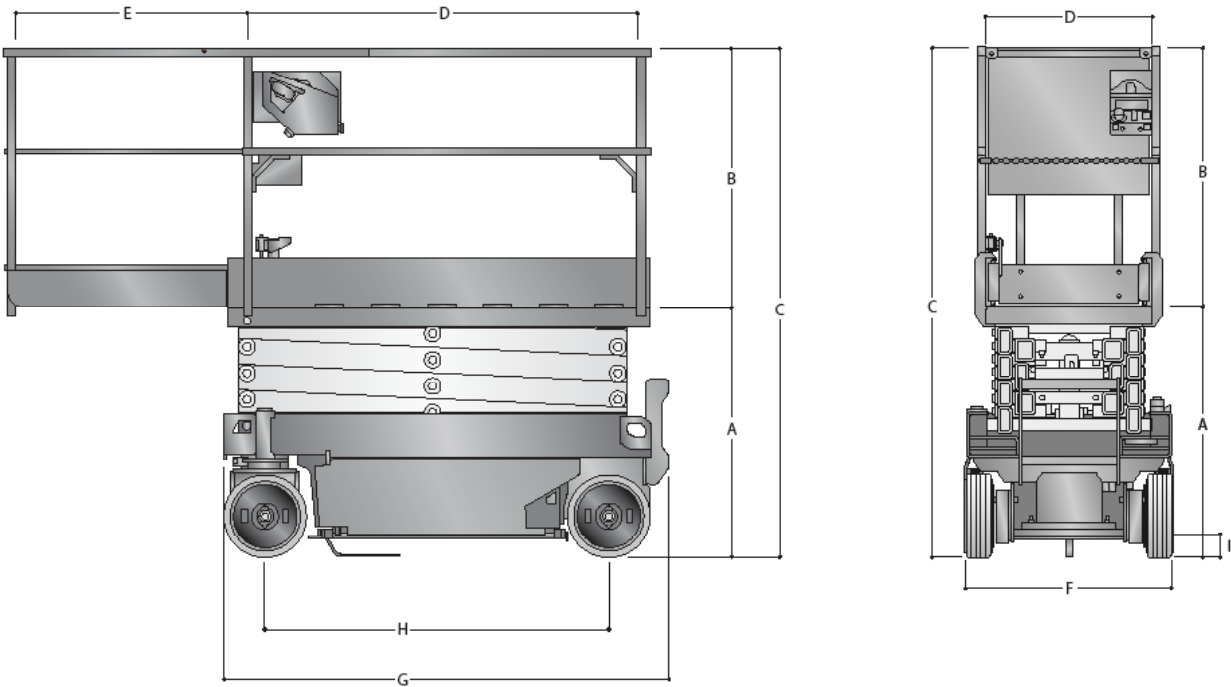

JLG Model 4045R